




# INSTALLATION INSTRUCTIONS


Tech Support  
856-768-5700 EXT 2  
TechSupport@LEDGlow.com

## Wireless Remote Reprogramming for Motorcycle Lighting Kits

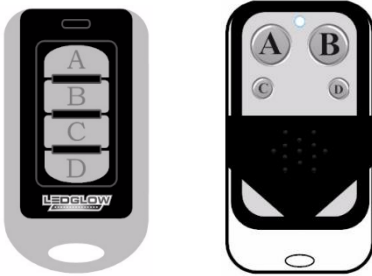


This style of remote is compatible with several different control boxes. Instructions on pairing one of these remotes to your specific control box can be found below.

### Advanced Million Color Smartphone Motorcycle Controller

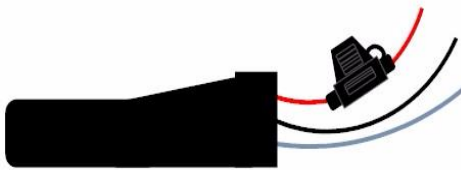


If the control box is currently connected to power and ground, please disconnect the ground wire from the ground source. Reconnect the ground wire back to the ground source and once this is connected, the LED light indicator on the control box will illuminate amber. Within 30 seconds from when the LED light indicator turns amber, you can press and hold any button on the wireless remote for 7 seconds. After, test the operation of your kit with the remote.

### Advanced Million & Single Color Motorcycle Controller

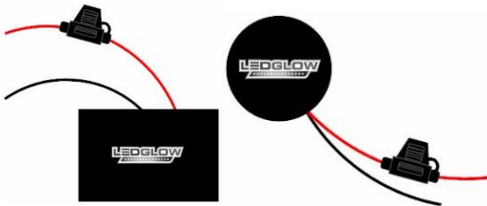

If the control box is currently connected to power and ground, please disconnect the ground wire from the ground source. Reconnect the ground wire back to the ground source and once this is connected, the lights on the strips will turn on green. Within 5 seconds from when the kit turns on green, you can then press the A and then the B button on the wireless remote. If this programming was successful, the light strips will flicker green twice and the kit will remain powered on. After, test the operation of your kit with the remote.

### Previous Model Million & Single Color Motorcycle Controller

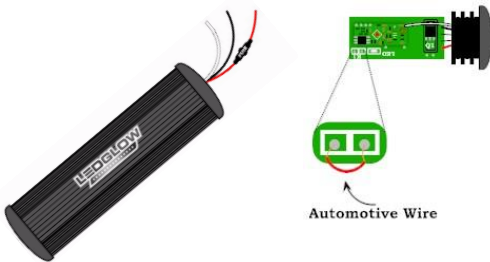

With 12V power connected to the control box and the control box powered off, remove the end cap with the lead wires to slide the circuit board out of the control box housing. Remove the tape from around the circuit board. Using a flat head screw driver, touch both silver tabs located below “K1” (see image left) at the same time until the yellow LED next to it illuminates. Once the red LED is illuminated, press any button on the new 4 button wireless remote. The LED will flash and then turn off. Now press the “D” button on the remote to test for functionality. Cover the circuit board with the tape you removed in Step 3 and slide the board back into the control box housing.


**NOTE: Either remote is compatible with all of the control boxes listed.**

# INSTALLATION INSTRUCTIONS




**Tech Support**  
**856-768-5700 EXT 2**  
**TechSupport@LEDGlow.com**

## Flexible Million Color Motorcycle Controller



With 12V power connected to the control box and the control box powered off, press and hold the button on the control box as well as the “B” button on the remote simultaneously for 7 seconds. After, test the operation of your kit with the remote. This remote is compatible with the following control boxes:



**NOTE:** LEDGlow warrants to the original retail customer purchaser, and not to any other purchaser or subsequent owner that the product will be free from defects in material or workmanship for one (1) year from the purchase date. This warranty does not cover any product that is (1) installed incorrectly, (2) damaged by collisions, vandalism, or other accidents, or (3) improperly or incorrectly used or damaged by similar causes. Purchaser’s sole and exclusive remedy for damages against LEDGlow shall not be greater than the actual purchase price of the product for which the claim is made. TERMS AND CONDITIONS CAN BE VIEWED IN FULL AT <https://www.ledunderbody.com/limited-warranty/>